



**Federal Aviation
Administration**

Initial En Route Qualification Training

**Instructor
Lesson 13
Altimeter Setting and
Altitude Assignment**

Course 50148001

LESSON PLAN DATA SHEET

COURSE NAME: INITIAL EN ROUTE QUALIFICATION TRAINING
COURSE NUMBER: 50148001

LESSON TITLE: ALTIMETER SETTING AND ALTITUDE ASSIGNMENT

DURATION: 3+00 HOURS

DATE REVISED: 2022-02
VERSION: V.2022-02

REFERENCE(S): FAA ORDER JO 7110.65, AIR TRAFFIC CONTROL;
FAR, PART 91.159, VFR CRUISING ALTITUDE OR FLIGHT LEVEL;
FAA-H-8038-15A, INSTRUMENT FLYING HANDBOOK

HANDOUT(S): ALTIMETER SETTING AND ALTITUDE ASSIGNMENTS


**EXERCISE(S)/
ACTIVITY(S):** EXERCISE 1: ALTITUDE ASSIGNMENTS
EXERCISE 2: ALTITUDE ASSIGNMENT PHRASEOLOGY AND
STRIPMARKING

**END-OF-LESSON
TEST:** YES (*REFER TO ELT13.PDF*)

**PERFORMANCE
TEST:** NONE

MATERIALS: NONE

**OTHER PERTINENT
INFORMATION:** NONE

 **NOTE:** *As you prepare for this lesson, recall and be prepared to talk about examples and personal experiences that illustrate or explain the teaching points in the lesson.*

DISCLAIMER

Air Traffic training materials are provided by the Federal Aviation Administration Office of Technical Training. The training materials are subject to revision, amendment and/or corrections. The materials are to be used for the intended purpose only and are not intended for distribution beyond the purpose of training. Updates (if required) shall be provided through a formal distribution process. Unsolicited updates will not be processed.

INTRODUCTION


**Gain
Attention**




Initial En Route Qualification Training

Lesson 13 Altimeter Setting and Altitude Assignments

V.2022-02
Presented by
FAA Academy
Air Traffic Division



Federal Aviation
Administration



In the Departure Procedures lesson, you learned how to transition an IFR aircraft from the ground into the en route environment. Once an aircraft has departed the airport, controllers **must** continue to issue altitude assignments. Altitude assignments **must** ensure that the aircraft maintains a safe distance, **not only** from other aircraft, but also from terrain, obstructions, or other airspace. You will also learn procedures to issue current and accurate altimeter settings.

Continued on next page

INTRODUCTION *(Continued)*

Gain Attention



ALTIMETER SETTING AND ALTITUDE ASSIGNMENT REQUIREMENTS

2

How do air traffic controllers determine proper altitudes to assign aircraft in order to provide separation from other aircraft? What factors affect these altitudes?

Purpose

This lesson will help you understand proper altitude assignment, restrictions, verification, and phraseology. In addition, you will learn the procedures for issuing current altimeter settings.

Lesson Objectives



LESSON OBJECTIVES


- On an End-of-Lesson Test, and in accordance with FAA Order JO 7110.65, you will identify procedures and phraseology for:
 - Issuing altimeter settings
 - Assigning altitudes
 - Confirming altitudes

3

 **NOTE:** Teach from graphic.

ALTIMETER SETTINGS

Altimeter Setting Definition
JO 7110.65,
Pilot/Controller
Glossary,
FAA-H-8038-15A

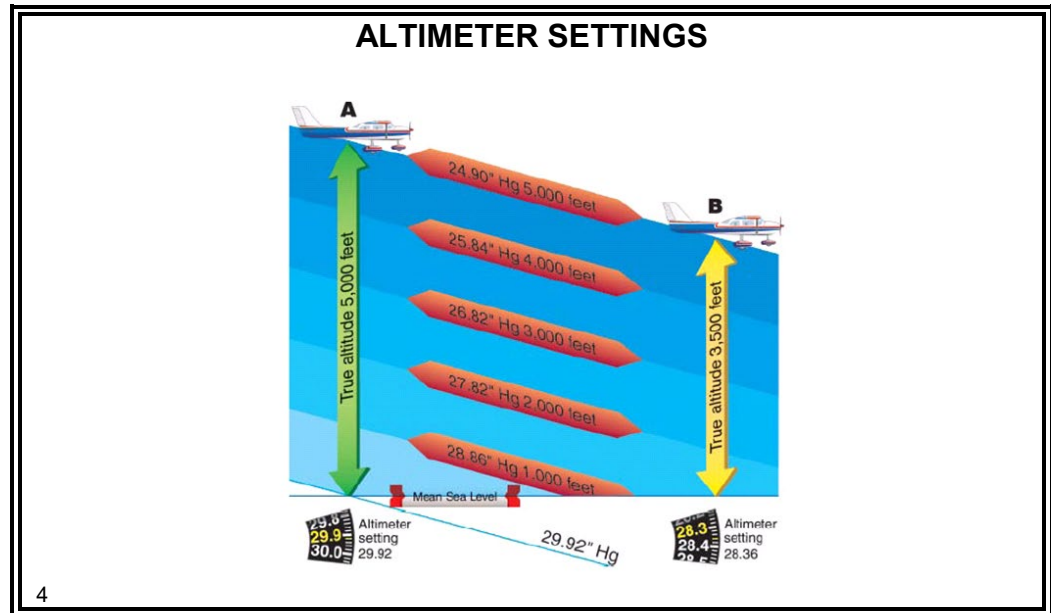

An **altimeter setting** is the barometric pressure reading used to adjust a pressure altimeter for variations in existing atmospheric pressure or to the standard altimeter setting (29.92).

Current Settings
JO 7110.65,
par. 2-7-1,
FAA-H-8038-15A

- ⦿ Current altimeter settings must be obtained from weather reporting stations.
- ☞ **NOTE:** *The primary source of altimeter settings in the en route environment is weather reporting stations, most of which are automated.*
- ⦿ Maintaining a current altimeter setting is critical because atmospheric pressure is **not** constant.
 - In one location the pressure might be higher than the pressure just a short distance away

NOTE: In areas where altimeters are fluctuating, the controller should be aware that altitudes for aircraft will also fluctuate; therefore, the controller may want to issue the altimeter more frequently than required by the JO 7110.65.

ALTIMETER SETTINGS *(Continued)*

Altimeter Setting Issuance

JO 7110.65,
pars. 2-7-2, 4-5-4

- ⦿ Issue the current altimeter setting to:
 - All en route aircraft operating below FL180 at least one time while operating within your area of jurisdiction
 - Aircraft cleared to descend below the lowest usable flight level
 - Issue an altimeter setting obtained from the weather reporting station nearest the point the aircraft will descend through the lowest usable flight level
 - Arriving aircraft approximately 50 miles from the destination if that airport is **not** served by an approach control facility
 - Issue destination altimeter setting
- ⦿ Use the following table to determine the lowest usable flight level to clear aircraft at or above 18,000 feet MSL.

ALTIMETER SETTING	LOWEST USABLE FL
29.92 or higher	180
29.91 to 28.92	190
28.91 to 27.92	200

- ⦿ Identify the source of the report.
- ⦿ State if the report is **more than** one hour old.

☞ **NOTE:** *Stress the importance of identifying an altimeter report more than an hour old, especially in the arrival phase of flight. Notify your supervisor.*

✈ Phraseology

“THE (facility name) ALTIMETER (setting) MORE THAN ONE HOUR OLD.”

✈ Phraseology Examples

“The Jackson altimeter, two niner niner four.”

“The Vicksburg altimeter two niner eight niner more than one hour old.”

ALTIMETER SETTINGS (Continued)

Knowledge Check



KNOWLEDGE CHECK

The diagram illustrates an aircraft flying at FL180, 100 miles from Destination ASOS. Below the aircraft are three ground stations: Destination ASOS, JAN ASOS, and GWO ASOS. A dashed blue line connects the aircraft to Destination ASOS. A horizontal dotted line labeled FL180 extends from the aircraft to the right. A vertical red line connects JAN ASOS to the FL180 line. A vertical red line connects GWO ASOS to the FL180 line.

❖ **QUESTION:** Which altimeter setting should be issued?

- A. Destination
- B. JAN
- C. GWO

5

☞ **NOTE:** Click once to show answer.

ANSWER: B



KNOWLEDGE CHECK

❖ **QUESTION:** The current time is 1351Z. What is the phraseology for issuing the 1300Z Jackson altimeter setting of 29.92?

6

☞ **NOTE:** Click once to show answer.

ANSWER: "The Jackson altimeter, two niner niner two."

Continued on next page

ALTIMETER SETTINGS *(Continued)*

Knowledge
Check
(Cont'd)



KNOWLEDGE CHECK

❖ **QUESTION:** The current time is 1730Z. What is the phraseology for issuing the 1600Z Vicksburg altimeter setting of 29.92?

7


☞ **NOTE:** Click once to show answer.

ANSWER: “The Vicksburg altimeter two niner niner two more than one hour old.”

ALTITUDE ASSIGNMENT REQUIREMENTS

Altitude for Direction of Flight

JO 7110.65,
par. 4-5-2,
table 4-5-1

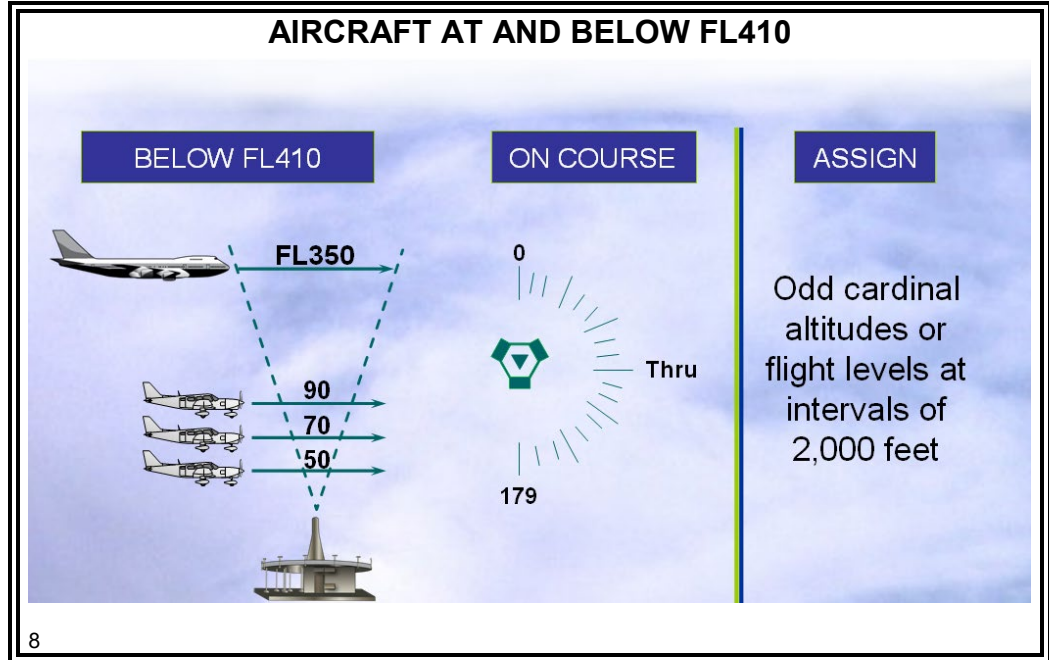


- ⦿ For aircraft operating at and below FL410:
 - On course degrees magnetic 0 through 179, assign:
 - Odd cardinal altitudes or flight levels at intervals of 2,000 feet

Continued on next page

ALTITUDE ASSIGNMENT REQUIREMENTS *(Continued)*

Altitude for Direction of Flight (Cont'd)

JO 7110.65,
par. 4-5-2,
table 4-5-1

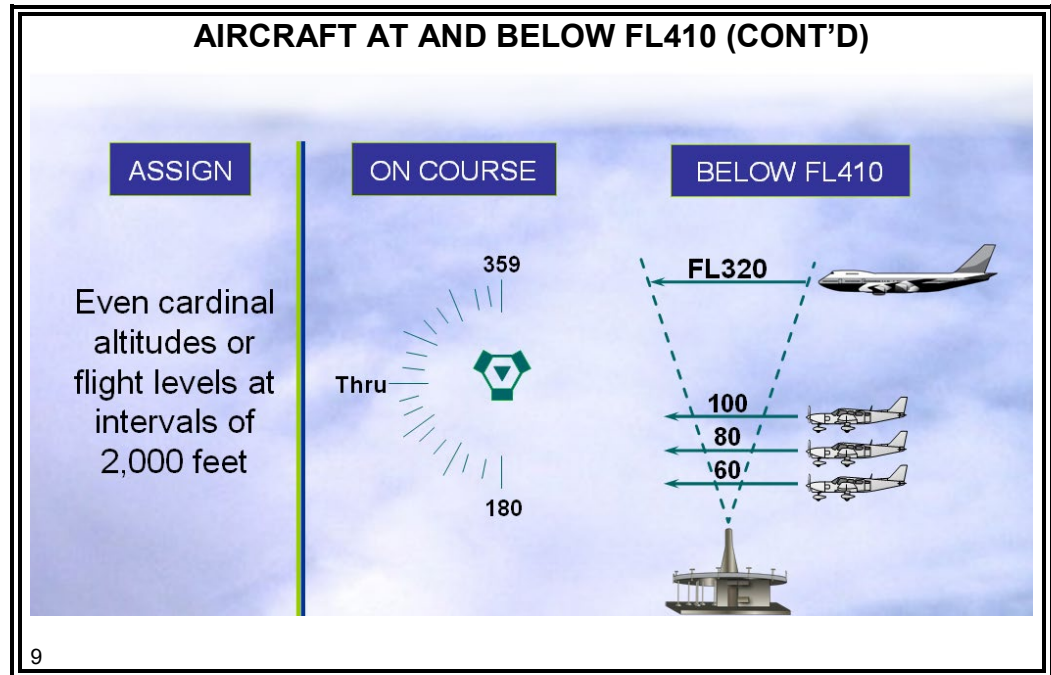


- On course degrees magnetic 180 through 359, assign:
 - Even cardinal altitudes or flight levels at intervals of 2,000 feet

Continued on next page

ALTITUDE ASSIGNMENT REQUIREMENTS *(Continued)*

Altitude for Direction of Flight (Cont'd)

JO 7110.65,
par. 4-5-2,
table 4-5-1

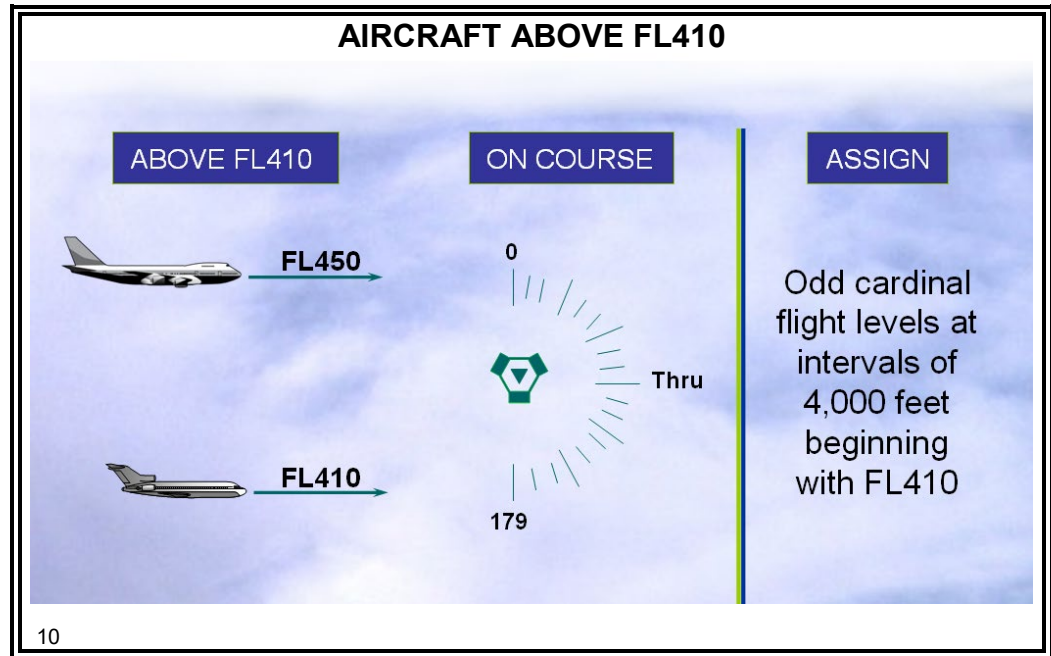


- ⊙ For aircraft operating above FL410:
 - Course degrees magnetic 0 through 179, assign:
 - Odd cardinal flight levels at intervals of 4,000 feet beginning with FL410

Continued on next page

ALTITUDE ASSIGNMENT REQUIREMENTS *(Continued)*

Altitude for Direction of Flight (Cont'd)

JO 7110.65,
par. 4-5-2,
table 4-5-1

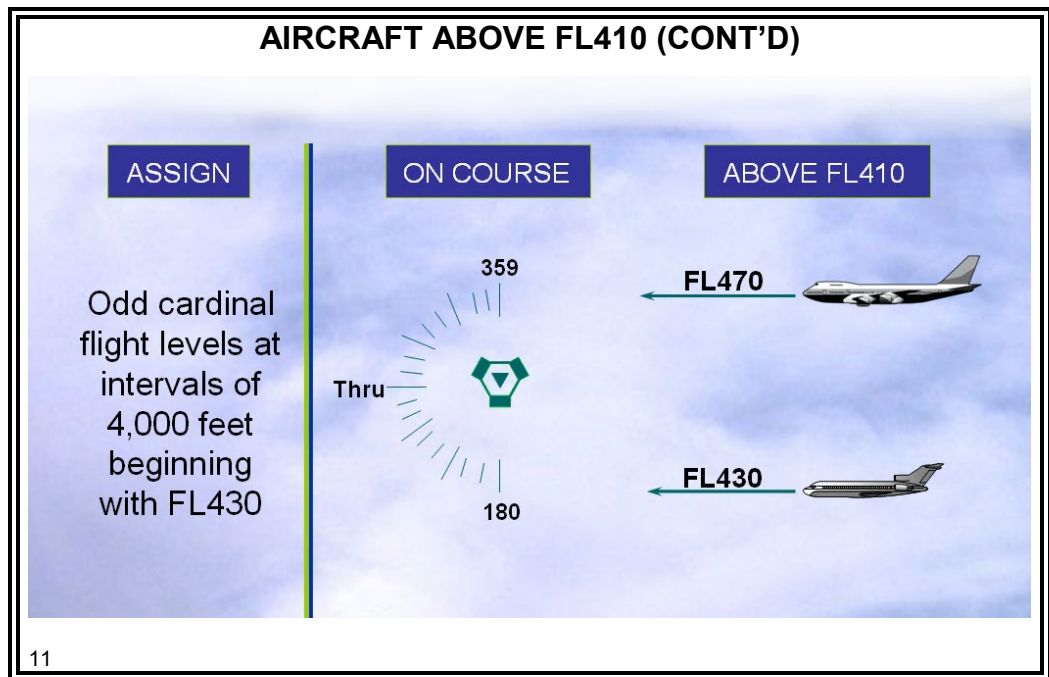

- On course degrees magnetic 180 through 359, assign:
 - Odd cardinal flight levels at intervals of 4,000 feet beginning with FL430

ALTITUDE ASSIGNMENT REQUIREMENTS *(Continued)*

Knowledge Check



KNOWLEDGE CHECK

❖ **QUESTION:** An IFR aircraft flying a magnetic course of 330 degrees has requested a climb to 8,000. Is that an appropriate altitude for direction of flight? Explain.

12

👉 **NOTE:** Click once to show answer.

ANSWER: Yes. On magnetic courses between 180 and 359, even cardinal altitudes at intervals of 2,000 feet are appropriate.

Exceptions

JO 7110.65,
pars. 4-5-3, 2-1-2

- ⦿ With **prior approval** from the affected sector or facility concerned, you may assign an altitude regardless of direction of flight as follows:
 - Traffic conditions prevent the assignment of an appropriate altitude
 - Specific procedures are covered in facility directives and/or inter-facility LOAs
 - The aircraft is experiencing meteorological conditions (e.g., icing, turbulence, weather activity)

NOTE: Because meteorological conditions can deteriorate into an emergency situation, they warrant priority consideration. (Reference FAA Order JO 7110.65 par. 2-1-2)

- A military aircraft is operating on a random route
- The pilot informs you the available appropriate altitude exceeds the aircraft's operational limitations

ALTITUDE ASSIGNMENT REQUIREMENTS *(Continued)*

Exceptions

Example

JO 7110.65,
par. 4-5-3



EXCEPTION TO THE FLIGHT DIRECTION RULE

13

NOTE: Teach from graphic. Click once to show dialogue.



REQUEST APPROVAL FROM NEXT SECTOR OR ADJACENT FACILITY

14

NOTE: Teach from graphic.

ALTITUDE ASSIGNMENT REQUIREMENTS *(Continued)*

Stripmarking

JO 7110.65,
par. 2-3-10,
fig. 2-3-7



INAPPROPRIATE ALTITUDE FOR DIRECTION OF FLIGHT (IAFDOF)						
N47P	MLU	08	150	ZAMMA	KPSN./MLU V18 MHZ V245	4676
BE20/A	0044	01	<u>140</u>		IGB KUBS/0220	
T230						
66						
246	01	MHZ				

Underline the altitude in **RED**.

15

☞ **NOTE:** Teach from graphic.

EXERCISE 1: ALTITUDE ASSIGNMENTS

Exercise 1



ALTITUDE ASSIGNMENTS EXERCISE



Purpose: to identify the appropriate altitude assignments for aircraft

Directions: review the given flight progress strips and answer the questions

16

Directions

Items 1 through 7 are short answer. Write your answers in the spaces provided. You may refer to your Aero Center Airspace Map and the Altitude Assignment Table in the appendix of this document, if needed.

Questions

QUESTION 1: Has United Twenty been assigned an appropriate altitude for direction of flight?

UAL20	MEI 1810	19 18	100	GLH	KMEI V18 MHZ V74 KGLH	4465
B738/I T410 G425						
66						
477 02		MHZ				

ANSWER: Yes

Continued on next page

EXERCISE 1: ALTITUDE ASSIGNMENTS *(Continued)*

Questions (Cont'd)

❖ **QUESTION 2:** Would the requested altitude for November One Two Three Foxtrot be appropriate?

N123F				MHZ	KGWO SQS V9 MHZ KJAN/0027	3241
PA27/A						
T160						
66						
322	01		KGWO P1200	70		

ANSWER: Yes

❖ **QUESTION 3:** Has November Five Zero Zero Yankee been assigned an appropriate altitude for direction of flight?

N500Y	IGB 1000	48	80	KGWO 1055	KUBS IGB V278 SQS KGWO	1025
M20P/A		10				
T160	G165					
66						
120	03	SQS				

ANSWER: Yes

❖ **QUESTION 4:** Has Air Force One Six Two Three Four been assigned an appropriate altitude for direction of flight?

A16234	TXK 1221	33	280	IGB	KAMA TXK J52 IGB KCBM	0612
T38/P		12				
T480	G500					
66						
711	03	SQS				

ANSWER: No

Continued on next page

EXERCISE 1: ALTITUDE ASSIGNMENTS *(Continued)*

Questions (Cont'd)

❖ **QUESTION 5:** What appropriate altitudes between 110 and FL180 can be assigned to Turk One One?

TURK11			↑	HEZ	KJAN MHZ V245 AEX KEFD	4327
F16/P T510						
66						
228 01		KJAN P1705		???		ZCH

ANSWER: 120, 140, and 160

❖ **QUESTION 6:** Has American Forty-Four been assigned an appropriate altitude for direction of flight?

AAL44	DORTS 1622	30	170	ZAMMA	KDAL MLU V417 MHZ V245	1037
MD88/L T430 G410		16			IGB KUBS	
66						
201 02		MHZ				

ANSWER: Yes

❖ **QUESTION 7:** What altitudes below 10,000 can be assigned to November One Two One Romeo Bravo?

N121RB			↑	HATER	KJAN V427 MLU V18 EIC	0331
BE65/B T165					KSHV/0101	
66						
514 01		KJAN P0600		???		

ANSWER: 60 or 80 (MEA on V427 is 5,000.)

☞ **NOTE:** 40 may be assigned initially, but a climb to at least 60 will be required for the route segment after HATER intersection.

ALTITUDE ASSIGNMENT PHRASEOLOGY

Instructions to Climb or Descend

JO 7110.65,
par. 4-5-7



INSTRUCTIONS TO CLIMB



ATC: Southwest Twenty-Three, climb and maintain one three thousand.

SWA23: Southwest Twenty-Three, climb and maintain one three thousand.

24

☞ **NOTE:** Introduce topic and then click **START** to play animation. “Animation Complete” will display when the animation is finished. Click the **REPLAY** button to play animation again.

☞ **NOTE:** Click outside the animation to advance to the next slide.

⦿ Issue instructions to climb or descend, including restrictions if required, as follows:

- Specify time restriction reference the UTC clock and issue a time check
- If you are in direct, two-way, VHF/UHF voice communication with the pilot and the aircraft is in radar contact, you may specify an elapsed time interval restriction, in full minute increments only, without any reference to the UTC clock.



Phraseology

“CLIMB/DESCEND AND MAINTAIN (altitude). if required,

AFTER PASSING (fix, waypoint), or AT (time) (time in hours, minutes, and nearest quarter minute).”

“CLIMB/DESCEND TO REACH (altitude) AT (time [issue time check] or fix, waypoint).”

“CLIMB/DESCEND TO REACH (altitude) within two minutes”.


ALTITUDE ASSIGNMENT PHRASEOLOGY *(Continued)*

Altitude to Maintain or Cruise Instructions

JO 7110.65,
par. 4-5-7



ALTITUDE TO MAINTAIN

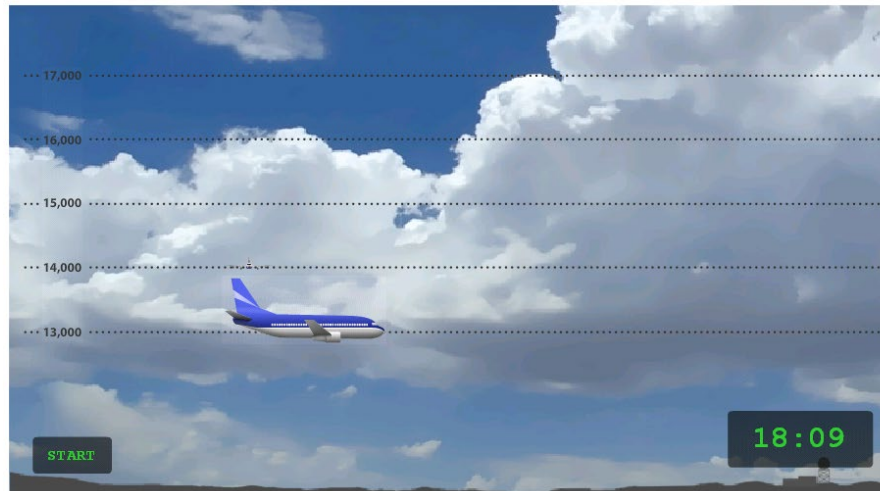

ATC: Delta Ten maintain one three thousand until one eight one two, climb and maintain one five thousand, time one eight one zero.
DAL10: Delta Ten maintain one three thousand until one eight one two, climb and maintain one five thousand.

25

☞ **NOTE:** Introduce topic and then click **START** to play animation. “Animation Complete” will display when the animation is finished. Click the **REPLAY** button to play animation again.

☞ **NOTE:** Click outside the animation to advance to the next slide.

☉ Issue altitude to maintain or cruise instructions as follows:



Phraseology

“MAINTAIN/CRUISE (altitude).”

“MAINTAIN (altitude) UNTIL (time [issue time check], fix, waypoint).”

“CROSS (fix, point, waypoint) AT or ABOVE/BELOW (altitude), CRUISE (altitude).”

“INTERCEPT (route) AT OR ABOVE/BELOW (altitude), CRUISE (altitude).”

ALTITUDE ASSIGNMENT PHRASEOLOGY *(Continued)*


Instructions to Climb or Descend

JO 7110.65,
par. 4-5-7



INSTRUCTIONS TO DESCEND

Example 1

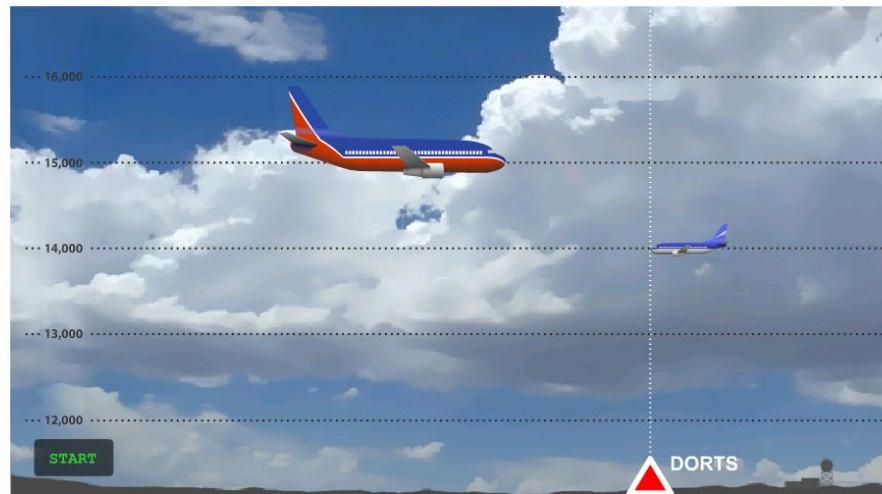

ATC: American Fourteen Twenty-Three, maintain one five thousand until DORTS, descend and maintain one three thousand.

AAL1423: American Fourteen Twenty-Three, maintain one five thousand until DORTS, descend and maintain one three thousand.

26

☞ **NOTE:** Introduce topic and then click **START** to play animation. "Animation Complete" will display when the animation is finished. Click the **REPLAY** button to play animation again.

☞ **NOTE:** Click outside the animation to advance to the next slide.

Continued on next page

ALTITUDE ASSIGNMENT PHRASEOLOGY *(Continued)*


Instructions to Climb or Descend (Cont'd)

JO 7110.65,
par. 4-5-7



INSTRUCTIONS TO DESCEND

Example 2

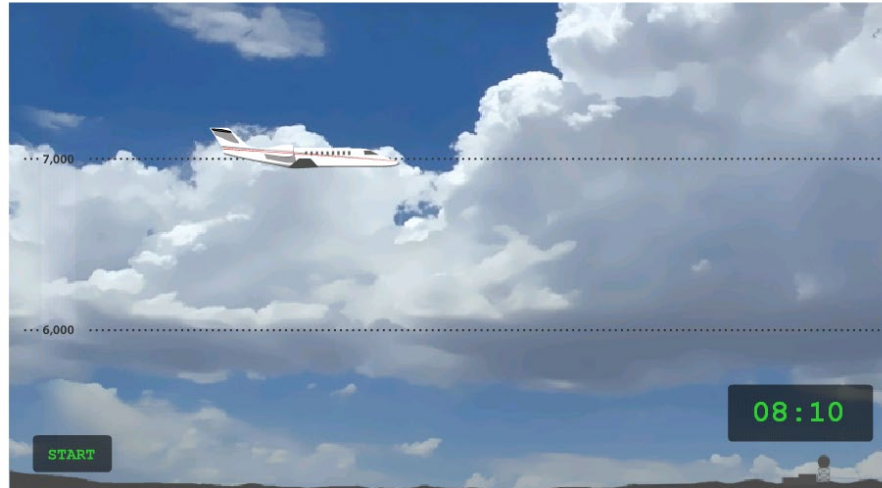

ATC: November Two Five Papa, descend to reach six thousand at or before zero eight one four, time zero eight one one.

N25P: November Two Five Papa, descend to reach six thousand at or before zero eight one four.

27

☞ **NOTE:** Introduce topic and then click **START** to play animation. "Animation Complete" will display when the animation is finished. Click the **REPLAY** button to play animation again.

☞ **NOTE:** Click outside the animation to advance to the next slide.

ALTITUDE ASSIGNMENT PHRASEOLOGY *(Continued)*

Assignment of Specified Altitude Over Fix or Waypoint
JO 7110.65,
par. 4-5-7



SPECIFIC ALTITUDE OVER FIX



ATC: November Two Five Papa, cross Sidon VORTAC at and maintain one zero thousand.
N25P: November Two Five Papa, cross Sidon VORTAC at and maintain one zero thousand.

28

☞ **NOTE:** Introduce topic and then click **START** to play animation. “Animation Complete” will display when the animation is finished. Click the **REPLAY** button to play animation again.

☞ **NOTE:** Click outside the animation to advance to the next slide.

⦿ Assign a specified altitude over a specified fix or waypoint as follows:



Phraseology

“CROSS (fix, waypoint) AT (altitude)”

“CROSS (fix, waypoint) AT OR ABOVE/BELOW (altitude)”

ALTITUDE ASSIGNMENT PHRASEOLOGY *(Continued)*

Pilot's Discretion

JO 7110.65,
par. 4-5-7



PILOT'S DISCRETION DESCENT



ATC: United Two Twelve cross Magnolia VORTAC at and maintain 7000.

UAL212: United Two Twelve cross Magnolia VORTAC at and maintain 7000.

29

☞ **NOTE:** Introduce topic and then click **START** to play animation. "Animation Complete" will display when the animation is finished. Click the **REPLAY** button to play animation again.

☞ **NOTE:** Click outside the animation to advance to the next slide.

☉ Assign a clearance to climb/descend at pilot's discretion as follows:



Phraseology

"CLIMB/DESCEND AT PILOT'S DISCRETION"

NOTE: Crossing restrictions, approach clearances, and cruise clearances allow for descent at pilot's discretion.

Continued on next page

ALTITUDE ASSIGNMENT PHRASEOLOGY *(Continued)*

Pilot's Discretion (Cont'd)

JO 7110.65,
par. 4-5-7



Phraseology

- ⦿ Portion of climb/descent may be authorized at pilot's discretion.
 - Specify altitude to which aircraft **must** climb/descend, followed by altitude to maintain at pilot's discretion

"CLIMB/DESCEND NOW TO (altitude), THEN CLIMB/DESCEND AT PILOT'S DISCRETION, MAINTAIN (altitude)."

NOTE: Pilot's discretion, when used in conjunction with altitude assignments, means that ATC has offered the pilot the option of starting climb or descent whenever he/she wishes and conducting the climb or descent at any rate he/she wishes. He/she may temporarily level off at any intermediate altitude. However, once he/she has vacated an altitude, he/she may **not** return to that altitude. When you issue a pilot's discretion clearance, you **must** protect more altitudes for a longer period of time.

Canceling Pilot's Discretion

JO 7110.65,
par. 4-2-5

- ⦿ When canceling pilot's discretion portion of a climb/descent clearance:
 - Assign a new altitude and inform the pilot that the new altitude is an amended altitude
-

Route Or Altitude Amendments

JO 7110.65,
par. 4-2-5

- ⦿ When a route or altitude in a previously issued clearance is amended, restate all applicable restrictions.
-

ALTITUDE ASSIGNMENT PHRASEOLOGY *(Continued)*

Assigning More Than One Altitude

JO 7110.65,
par. 4-5-7



ASSIGNING MORE THAN ONE ALTITUDE



ATC: Yukon One Five, maintain block one five thousand through one seven thousand.
Yukon15: Yukon One Five, maintain block one five thousand through one seven thousand.

30

☞ **NOTE:** Introduce topic and then click **START** to play animation.
“Animation Complete” will display when the animation is finished. Click the **REPLAY** button to play animation again.

☞ **NOTE:** Click outside the animation to advance to the next slide.

☉ Assign **more than** one altitude as follows:



Phraseology

“MAINTAIN BLOCK (altitude) THROUGH (altitude)”

ALTITUDE ASSIGNMENT PHRASEOLOGY *(Continued)*

Instructions When Pilot Cannot Accept Clearance

JO 7110.65,
par. 4-5-7

☉ When a pilot is unable to accept a clearance:

- Issue revised instruction to ensure positive control and approved separation

NOTE:

1. 14 CFR Section 91.123 states that a pilot is **not** allowed to deviate from an ATC clearance “that has been obtained...unless an amended clearance is obtained” (except when an emergency exists).
2. A pilot is therefore expected to advise the controller if a clearance **cannot** be accepted when the clearance is issued. “We will try” and other such acknowledgements do **not** constitute pilot acceptance of an ATC clearance.

☞ **NOTE:** *Such acknowledgements would require an additional action (i.e., coordination and/or clearance).*

3. Controllers are expected to issue ATC clearances which conform with normal aircraft operational capabilities and do **not** require “last minute” amendments to ensure standard separation.
 4. “Expedite” is **not** to be used in lieu of appropriate restrictions to ensure separation.
-

ALTITUDE ASSIGNMENT PHRASEOLOGY *(Continued)*

Anticipated Altitude Change

JO 7110.65,
par. 4-5-8



Phraseology

☉ Inform aircraft when to:

- Expect climb/descent clearance, or
- Request altitude change from another facility

“EXPECT HIGHER/LOWER IN (number of miles or minutes)
MILES/MINUTES,

or

AT (fix).”

“REQUEST ALTITUDE/FLIGHT LEVEL CHANGE FROM (name of facility).

if required,

AT (time, fix, or altitude).”

Knowledge Check



KNOWLEDGE CHECK

❓ **QUESTION:** N46P is westbound on V278 at six thousand requesting one zero thousand. In order to protect traffic southbound on V9 at seven thousand, you determine that a 6-mile crossing restriction northeast of Sidon is necessary. What is the proper phraseology to issue this clearance?

31

👉 **NOTE:** Click once to show answer.

ANSWER: “November Four Six Papa, cross six miles northeast Sidon VORTAC at or above eight thousand. Climb and maintain one zero thousand.”

EXERCISE 2: ALTITUDE ASSIGNMENT PHRASEOLOGY AND STRIPMARKING

Exercise 2



ALTITUDE ASSIGNMENT PHRASEOLOGY AND STRIPMARKING EXERCISE



Purpose: to practice issuing altitude clearances and using altitude assignment phraseology

Directions: review the given flight progress strips, mark the strips with the appropriate altitude clearance, then write the correct phraseology

32

Directions

For items 1 through 4, write the altitude assignment phraseology indicated by the flight progress strip shown. For items 5 through 8, mark the strips accordingly based on the altitude clearances provided.

NOTE: For the purpose of this exercise, **no** coordination is shown on the flight progress strips.



NOTE: Have students complete the exercise. Review the answers with students by displaying the next seven slides.

Continued on next page

EXERCISE 2: ALTITUDE ASSIGNMENT PHRASEOLOGY AND STRIPMARKING *(Continued)*

Questions



EXERCISE 2 – QUESTION 1						
N512Y		<div style="text-align: center;">↑</div>	<div style="text-align: center;">↑ 90</div>	HLI	KGWO SQS V535 HLI	D-A
BE35/B			<div style="text-align: center;">X8NE SQS</div>		M41/0051	
T195			<div style="text-align: center;">↓ 70</div>			
66						
01		KGWO P1700		90		

33

☞ **NOTE:** Click once to show answer.

ANSWER: “N512Y Cross eight miles northeast Sidon VORTAC at or below seven thousand, climb and maintain niner thousand.”



EXERCISE 2 – QUESTION 2						
UAL27	GLH	14	170 ✓ ↓ 150	MEI	KPBF/.GLH V74 MHZ V18	4010
A319/L	1803	18	170/26 SE		KMEI	
T420			GLH			
G410						
66						
126	01	MHZ				

34

☞ **NOTE:** Click once to show answer.

ANSWER: “Maintain one seven thousand until two six miles southeast Greenville VOR-DME, descend and maintain one five thousand.”

Continued on next page

EXERCISE 2: ALTITUDE ASSIGNMENT PHRASEOLOGY AND STRIPMARKING *(Continued)*

Questions
(Cont'd)



EXERCISE 2 – QUESTION 3							
SWA28		↑	↑ 100	MHZ	KGWO SQS V557 MHZ V245	4521	D-A
B733/I			X7SW SQS		KHEZ		
T420			↓ 60				
66							
523	01	KGWO P1700		100			

35

☞ **NOTE:** Click once to show answer.

ANSWER: “SWA28 Cross seven miles southwest Sidon VORTAC at or below six thousand, climb and maintain one zero thousand.”



EXERCISE 2 – QUESTION 4							
JOKER06	IGB	22	80✓↑100	GLH	KCBM IGB V278 GLH KLRH	4522	
C130/A	1957	20	80/14 NE				
T310							
G300							
66							
701	03	SQS					

36

☞ **NOTE:** Click once to show answer.

ANSWER: “JOKER06 Maintain eight thousand until one four miles northeast Sidon VORTAC, climb and maintain one zero thousand.”

Continued on next page

EXERCISE 2: ALTITUDE ASSIGNMENT PHRASEOLOGY AND STRIPMARKING *(Continued)*

Questions
(Cont'd)




EXERCISE 2 – QUESTION 5

Mark the strip accordingly based on the clearance provided below.

UAL57	HEZ 1849	03 19	150✓	ZAMMA	KBTR HEZ V245 IGB KGTR	4523
A320/I T460 G470						
66						
227 01		MHZ				

“United Fifty-Seven, climb and maintain one seven thousand.”

37

 **NOTE:** Click once to show answer.

ANSWER:

UAL57	HEZ 1849	03 19	150✓ ↑170	ZAMMA	KBTR HEZ V245 IGB KGTR	4523
A320/I T460 G470						
66						
227 01		MHZ				

Continued on next page

EXERCISE 2: ALTITUDE ASSIGNMENT PHRASEOLOGY AND STRIPMARKING *(Continued)*

Questions
(Cont'd)



EXERCISE 2 – QUESTION 6

Mark the strip accordingly based on the clearance provided below.

AAL27	UJM 0202	12	170✓	MHZ	KMEM UJM V9 MHZ V11 KMOB	5232
CRJ7/L T420 G405		02				
66						
506	03	SQS				

“American Twenty-Seven, maintain one seven thousand until one seven miles southeast Sidon VORTAC, descend and maintain one five thousand.”

38

NOTE: Click once to show answer.

ANSWER:

AAL27	UJM 0202	12	170✓↓150	MHZ	KMEM UJM V9 MHZ V11 KMOB	5232
CRJ7/L T420 G405		02	170/17 SE			
66						
506	03	SQS				

Continued on next page

EXERCISE 2: ALTITUDE ASSIGNMENT PHRASEOLOGY AND STRIPMARKING *(Continued)*

Questions
(Cont'd)



EXERCISE 2 – QUESTION 7


Mark the strip accordingly based on the clearance provided below.

KING11				MHZ	KGWO SQS V11 MHZ V245 AEX KEFD	3445
C130/A						D-A
T310						
66						
722	01		KGWO P0015	120		

“King One One, ...cross five miles southeast Sidon VORTAC at or below six thousand, climb and maintain one two thousand.”

39

NOTE: The departure clearance has been issued with the destination airport as the clearance limit.

 **NOTE:** Click once to show answer.

ANSWER:

KING11				MHZ	KGWO SQS V11 MHZ V245 AEX KEFD	3445
C130/A						D-A
T310						
66						
722	01		KGWO P0015	120		

Continued on next page

EXERCISE 2: ALTITUDE ASSIGNMENT PHRASEOLOGY AND STRIPMARKING *(Continued)*

Questions
(Cont'd)



EXERCISE 2 – QUESTION 8

Mark the strip accordingly based on the clearance provided below.

UAL33	STUEE 2108	20	170✓	MEI	KSHV EIC V18 MEI KMGM	2023
A319/I T440 G410		21				
66						
514 01		MHZ				

“United Thirty-Three, maintain one seven thousand until eight miles southeast Magnolia VORTAC, descend and maintain one three thousand.”

40

NOTE: Click once to show answer.

ANSWER:

UAL33	STUEE 2108	20	170✓ ↓ 130	MEI	KSHV EIC V18 MEI KMGM	2023
A319/I T440 G410		21	170/8 SE			
66						
514 01		MHZ				



ALTITUDE ASSIGNMENT CONFIRMATION

Altitude Confirmation Requirements (Nonradar)


JO 7110.65,
par. 4-5-9



CONFIRM ALTITUDE

ON INITIAL CONTACT	ON EACH POSITION REPORT
<p>"Aero Center, American Ten, estimating Sidon VORTAC one seven one five."</p> 	 <p>"Aero Center, United Sixty-Two over Magnolia VORTAC at one seven one eight estimating Sidon VORTAC one seven two six."</p>

Don't they know their altitudes?



41

- ⦿ On initial contact, or when position reports are received, request a pilot to confirm his/her assigned altitude unless:
 - The pilot states the assigned altitude on initial contact
 - You assign a new altitude to a climbing or descending aircraft

Continued on next page

ALTITUDE ASSIGNMENT CONFIRMATION *(Continued)*

**Altitude
Confirmation
Requirements
(Nonradar)
(Cont'd)**
JO 7110.65,
par. 4-5-9



ALTITUDE CONFIRMATION EXCEPTIONS

Stated by pilot on initial contact


"Aero Center, American Four Twenty, One Four Thousand."

New altitude assigned to a climbing or descending aircraft

"American Four Twenty, climb and maintain one six thousand."

ARTCC

42

 **NOTE:** Click once to show dialogue.

**Altitude
Confirmation
Phraseology
(Nonradar)**

JO 7110.65,
par. 4-5-9



Phraseology

- ☉ Ask for altitude assignment verification in the following situations:
 - In level flight situations:

"VERIFY AT (altitude/flight level)"

Continued on next page

ALTITUDE ASSIGNMENT CONFIRMATION *(Continued)*

Altitude
Confirmation
Phraseology
(Nonradar)
(Cont'd)
JO 7110.65,
par. 4-5-9



✈
Phraseology
Example

ALTITUDE CONFIRMATION PHRASEOLOGY



ATC: United Two Ten verify assigned altitude one five thousand.
UAL210: United Two Ten is out of one four thousand three hundred climbing to one five thousand.

43

☞ **NOTE:** Introduce topic and then click **START** to play animation.
“Animation Complete” will display when the animation is finished. Click the **REPLAY** button to play animation again.

☞ **NOTE:** Click outside the animation to advance to the next slide.

- In climbing or descending situations if aircraft has been assigned an altitude below the lowest usable flight level:

✈
Phraseology

“VERIFY ASSIGNED ALTITUDE (altitude).”

- If aircraft has been assigned a flight level at or above the lowest usable flight level

✈
Phraseology

“VERIFY ASSIGNED FLIGHT LEVEL (flight level).”

IN CONCLUSION

Lesson Review



LESSON REVIEW

The following topics were covered in this lesson:

- Altimeter settings
- Altitude assignment requirements
- Altitude assignment phraseology
- Altitude assignment confirmation



44



NOTE: Teach from graphic. Review and elaborate briefly on the topics covered in this lesson.

End-of-Lesson Test



END OF LESSON TEST

Altimeter
Setting and
Altitude
Assignments



45

APPENDIX: ALTITUDE ASSIGNMENT TABLE

Altitude Assignment Table

JO 7110.65,
par. 4-5-2,
table 4-5-1

AIRCRAFT OPERATING	ON COURSE DEGREES MAGNETIC	ASSIGN	EXAMPLES
Below 3,000 feet above surface (AGL)	Any course	Any altitude	** Not used in Aero Center Airspace
At and below FL410	0 through 179	Odd cardinal altitude or flight levels at intervals of 2,000 feet	3,000 feet, 5,000 feet, FL310, FL330
	180 through 359	Even cardinal altitudes or flight levels at intervals of 2,000 feet	4,000 feet, 6,000 feet, FL320, FL340
Above FL410	0 through 179	Odd cardinal flight levels at intervals of 4,000 feet beginning with FL410	FL450, FL490, FL530
	180 through 359	Odd cardinal flight levels at intervals of 4,000 feet beginning with FL430	FL430, FL470, FL510
One-way routes (except in composite systems)	Any course	Any cardinal altitude or flight level below FL410 or any odd cardinal flight level above FL410	FL270, FL280, FL290, FL300, FL310, FL410, FL430, FL450
Within an ALTRV	Any course	Any altitude or flight level	
In transition to/from or within Oceanic airspace where composite separation is authorized	Any course	Any odd or even cardinal flight level including those above FL290	FL280, FL290, FL300, FL310, FL320, FL330, FL340
In aerial refueling tracks and anchors	Any course	Altitude blocks as requested. Any altitude or flight level	050B080, FL180B220, FL280B310
Aircraft within RVSM or RVSM transition airspace	Any course	Any designated cardinal altitude	FL330, FL340, FL350, FL360